




## Vacuum Test Capability

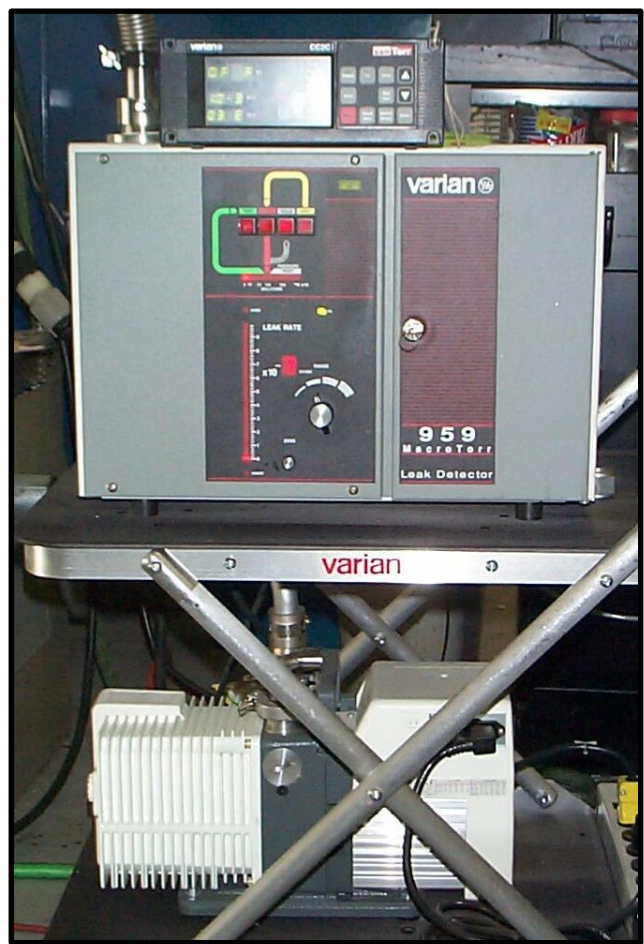

K+S Services utilizes a number of various pieces of testing equipment to fully test all vacuum products. We use the Varian 959 Porta-Test Leak Detector which has a minimum detectable signal / sensitivity of  $2 \times 10^{-8}$  atm cc/sec (helium) sniffing mode to detect leaks in accordance with AVS standard 2.1 .

We also use the “SenTorr” gauge controller in conjunction with the “524 Cold Cathode Ionization” gauge to measure vacuum down to  $1 \times 10^{-8}$  Torr. We additionally utilize the “ConvecTorr” gauge to test  $1 \times 10^{-3}$  Torr to atmosphere.

**ALL UNITS ARE SYSTEM TESTED**

**\*12 MONTH IN-SERVICE WARRANTY**

Unless otherwise stated at time of quotation

**\*NO CHARGE EVALUATION**

Priority repair orders may incur in evaluation fee